

STAINLESS STEEL BALL VALVE

1-PIECE REDUCED BORE

SIZE RANGE 8mm-50mm

BSP Ends



Suitable for Isolating duties in General Industrial Applications, Oil Pipelines, Hot Water Services, Condensate Lines, Water Treatment, HVAC, Mining, W.W.T.P. Applications, Gauge and Instrument Isolation


FEATURES

- Drip tight shut off
- PVC lever grip
- Compact, one piece design
- ISO 9001 approved manufacturer
- Stainless steel components

OPTIONS

- Fig. GVE-V2 (2-piece full bore, locking device)
- Fig. GVE-V3 (3-piece full bore, locking device)
- Fig. GVE-V1-NPT (end screwed NPT)

Fig. GVE-V1

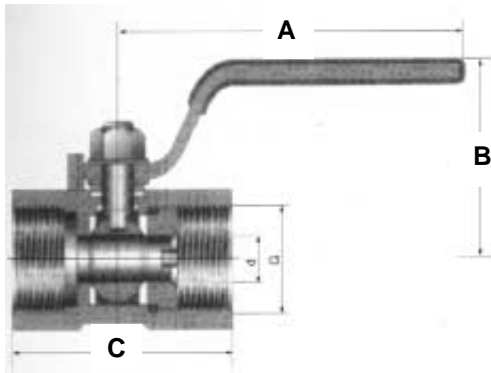

COMPONENT	MATERIAL
BODY	CF8M-STAINLESS STEEL
BALL	SS316
SEAT	P.T.F.E.
STEM	SS316
LEVER	SS304

DIMENSIONS

SIZE mm	8	10	15	20	25	32	40	50
A	64	70	90	90	103	103	127	127
B	35	37	43.5	47	50	57	69	74.5
C	39	44	56.5	58	70	78	83	100
MAX kPa @ 50°C	6,900	6,900	6,900	6,900	6,900	6,900	6,900	6,900
BORE \varnothing	5	7	9.2	12.5	15	20	24.5	32
CV	3.8	4	4.5	9	16	24	37	68
WT.KG	0.07	0.10	0.16	0.25	0.43	0.70	0.83	1.5

Data Sheet BL-GVE-V1-Rev01

For installation, operation and maintenance refer to I.O.M.

Details subject to change

Global Valves and Engineering Pty Ltd

"your partner for the future"

Tel: (02) 9868 5055 Fax: (02) 9868 5063 Email: sales@globalvalves.com.au Website: www.globalvalves.com.au