

FORGED STEEL CHECK VALVE

CLASS 800 API 602
SIZE RANGE 8mm-50mm SOCKET WELD



Suitable for preventing reverse flow in Water, Steam, Air, Gases and Petroleum based products in Oil and Gas, Petroleum, Petro Chemical, Pulp & Paper, Power Generation, Mining, Methane Extraction and other General Industrial Applications

FEATURES

- Bolted cover
- Hard faced seat
- Spring loaded disc
- Horizontal/vertical installation

OPTIONS

- Fig. 3674SL (NPT ends)
- Fig. 3682 (regular piston disc, no spring)
- Fig. 3684SL (ball disc, spring assisted)
- Fig. 3684 (regular ball disc)
- Fig. 3675XU-W (swing check)

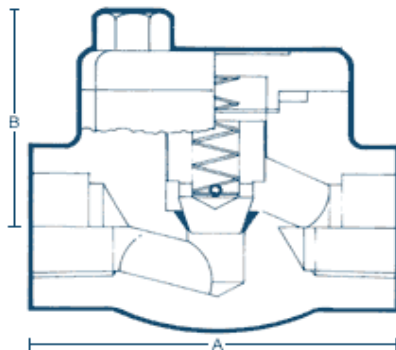


Fig. 3682SL



COMPONENT	MATERIAL
BODY/COVER	FORGED STEEL A105
TRIM	HALF STELUTE
GASKET	STAINLESS STEEL
BODY FINISH	PARKERISED

DIMENSIONS

SIZE mm	8	10	15	20	25	32	40	50
A	83	83	83	89	114	159	159	184
B	51	51	51	59	60	80	80	97
W.P. kPa @ 38°C	13,600	13,600	13,600	13,600	13,600	13,600	13,600	13,600
W.P. kPa @ 538°C	970	970	970	970	970	970	970	970
WT. KG	1.1	1.1	1.0	1.5	2.3	4.8	4.5	8.3

Data Sheet No. CP-3682SL-Rev01

For installation, operation and maintenance refer to I.O.M.

Details subject to change

Global Valves and Engineering Pty Ltd

"your partner for the future"

Tel: (02) 9868 5055 Fax: (02) 9868 5063 Email: sales@globalvalves.com.au Website: www.globalvalves.com.au